



# FLUID SENSORS

## PRODUCTS AT A GLANCE

Level sensors, pressure sensors,  
temperature sensors, flow sensors

**SICK**  
Sensor Intelligence.



## FLUID SENSORS AT SICK

Optimized control of process parameters is the main driver for increasing efficiency and reducing input of valuable resources. Whether it's pressure measurement, temperature measurement, level control or flow metering – SICK offers a wide range of solutions for measuring process variables for liquids, gases and bulk solids and protecting against overfill and dry run. SICK devices are rugged and easy to use. Innovative sensor technology enables accurate, universal measurement independent of material type.

|                                                                                  |           |
|----------------------------------------------------------------------------------|-----------|
| <b>General information</b> . . . . .                                             | <b>3</b>  |
| <b>Level sensors</b> . . . . .                                                   | <b>6</b>  |
| LFP Cubic, LFP Inox, LFH, UP56, UP56 Pure, MHF15, LfV200, LfV300, LBV300, LBV301 |           |
| <b>Pressure sensors</b> . . . . .                                                | <b>10</b> |
| PBS, PBS Hygienic, PAC50, PBT, PFT, PHT, PET                                     |           |
| <b>Temperature sensors</b> . . . . .                                             | <b>12</b> |
| TBS, TBT, TCT, TSP, THTS, THTE, THTL                                             |           |
| <b>Flow sensors</b> . . . . .                                                    | <b>14</b> |
| FFU, DOSIC®, Bulkscan® LMS511                                                    |           |



## Intelligent solutions for level and point level measurement

Whether for continuous level measurement, point level measurement or both – SICK offers a wide range of solutions for process engineering, storage and protection. Depending on the installation, characteristics of the liquid or solid, and ambient conditions, SICK provides a comprehensive product portfolio and a high level of expertise for more efficient processing.



## Universal pressure measurement for liquids and gases

SICK's portfolio of electronic pressure transmitters and switches can be optimally adapted to individual customer's requests thanks to its intelligent and versatile configuration possibilities. Typical of all solutions from SICK is the use of high-quality materials, robustness and precise measurement technology, in addition to being easy to operate and install.



## Universal temperature measurement for liquids and gases

With its product portfolio of screw-in and insertion thermometers as well as temperature switches, SICK offers high-quality solutions for contact temperature measurement in liquids and gases. The devices can optimally be adapted to meet individual requirements due to their various insertion lengths and the flexible mechanical configuration possibilities.



## Robust and precise – flow measurement technology from SICK

SICK provides innovative sensor solutions for flow measurement technology which combine flexible measuring methods and robust equipment design with cost-efficient connection concepts for higher-order systems. Whether you need to detect the current flow rate using analog values or find the quantity using pulse detection – SICK's flow sensors are always reliable and safe for a wide range of media and under difficult process and ambient conditions.

## Efficient level and point level measurement technology




SICK's innovative offering includes guided radar sensors (TDR), ultrasonic equipment, vibration principle devices and various optical technologies. With SICK, the focus is on the optimum solution for your application. To do so, we offer a broad sensor portfolio.

### Level measurement with LFP Inox


LFP Inox detects the level of storage containers to maintain the correct supply to the filling machine. Besides the aseptic design, the most important feature of this solution is fast, precise measurement.

#### Benefits:

- Quick response time
- High reproducibility
- Hygienic design
- High IP69K enclosure rating
- Simple installation

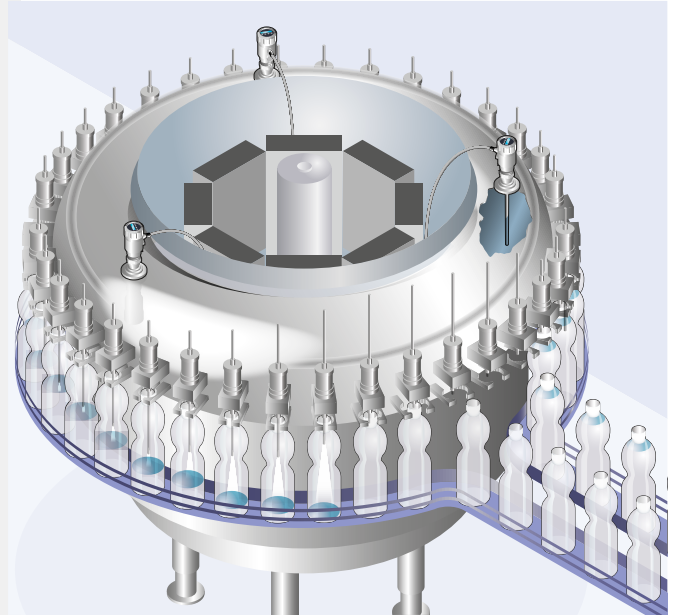

## Pressure measurement in liquids and gases




Measurement of pressure plays a central role in many areas of plant and mechanical engineering, the manufacturing industry, machine tooling, process engineering and the manufacture and processing of food and beverages.

### Control of workpiece clamping pressure with PBS with IO-Link


In CNC machines, the workpieces are often clamped hydraulically. Electronic pressure switches such as the PBS make sure that the correct clamping pressure is applied.

#### Benefits:

- Pressure switch, pressure transmitter and display in one device
- Quick product changeover through setpoint adjustment via IO-Link
- Ergonomic: Legible display, large buttons and turnable housing
- Rugged and reliable
- Various installation options

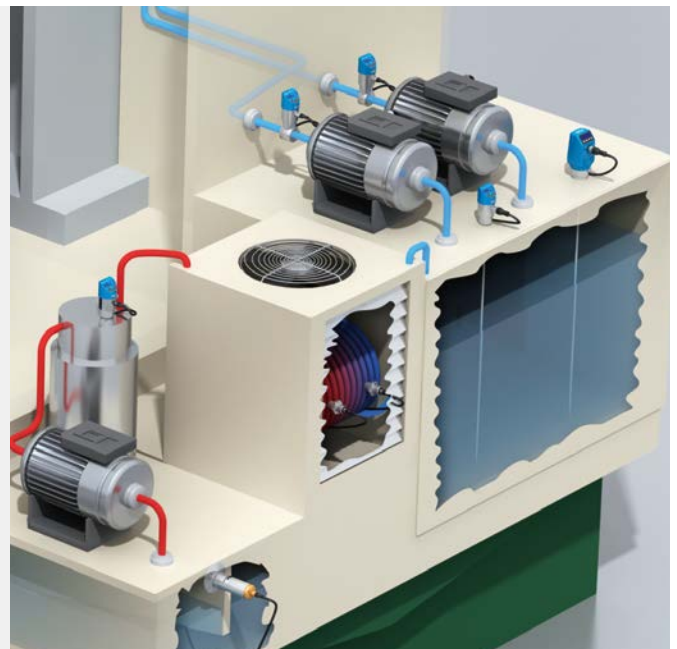

## Universal temperature measurement




Whether monitoring operating conditions or controlling sensitive processes, the reliable and accurate measurement of the temperature is of vital importance in many industry segments.

### Temperature control of cooling lubricants with TSP

Temperature sensors are employed in many areas. One example is the machine tool industry. Reliability and long-term stability of the thermometers is mandatory for reliable machine operation. To guarantee high quality machining of the work piece, the cooling lubricant is temperature-controlled. The SICK screw-in thermometer TSP is well-suited to measure the temperature of the cooling lubricant.

#### Benefits:

- Reliable
- Small dimensions
- Simple installation
- Cost-saving

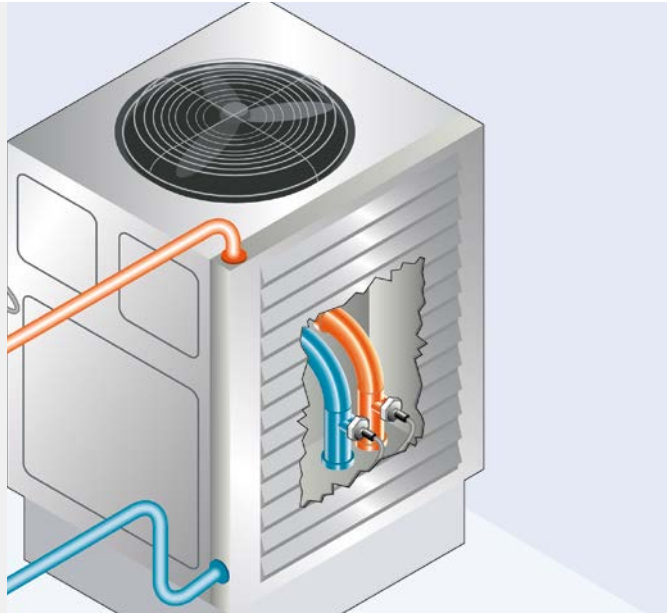

## Flow and throughput measurement with modern technology




SICK's flow meters combine innovative, real-time measurements based on ultrasonic and laser technology. These non-contact technologies are particularly ideal for their flexibility in a wide range of applications.

### Bulkscan® LMS511

The Bulkscan® LMS511, a non-contact measuring device that detects the profile of bulk material on the conveyor belt. The belt speed and the bulk material profile are then used to calculate a volume flow. This can be used to generate a rule for optimum belt speed to ensure economic belt usage.

#### Benefit:

- Low-maintenance throughput measurement
- Flexible use
- Optimum belt usage
- Belt monitoring to reduce belt wear

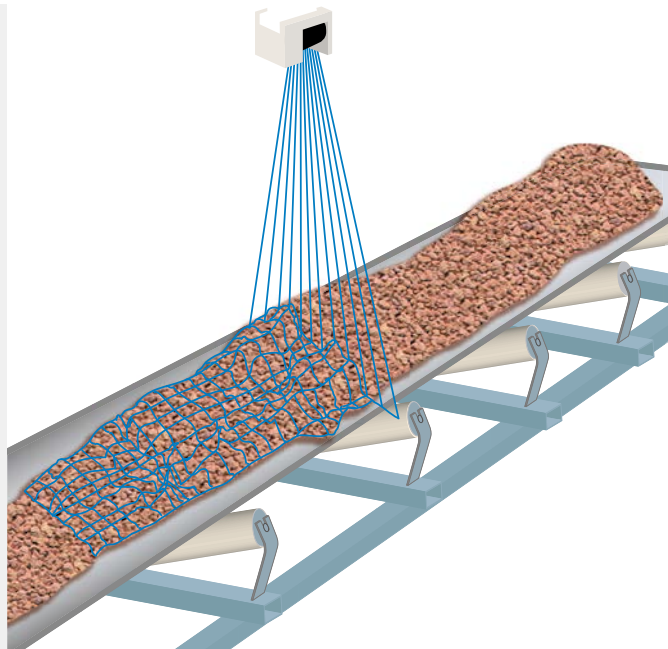

|  |                                                                                   |                                                                                    |                                                                                     |  |
|--|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
|  |  |  |  |  |
|  | <b>LFP Cubic</b>                                                                  | <b>LFP Inox</b>                                                                    | <b>LFH</b>                                                                          |  |
|  | Flexible up to the probe tip                                                      | The clean solution                                                                 | At a high level                                                                     |  |

## Technical data overview

|                            |                                                                                                                        |                                                          |                                                                                                                                           |  |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--|
| Measurement principle      | TDR sensor                                                                                                             | TDR sensor                                               | Level Probe                                                                                                                               |  |
| Detection principle        | Contact                                                                                                                | Contact                                                  | Contact                                                                                                                                   |  |
| Medium                     | Fluids                                                                                                                 | Fluids                                                   | Fluids                                                                                                                                    |  |
| Measurement                | Switch, continuous                                                                                                     | Switch, continuous                                       | Continuous                                                                                                                                |  |
| Process temperature        | -20 °C ... +100 °C                                                                                                     | -20 °C ... +180 °C                                       | -10 °C ... +50 °C<br>-10 °C ... +85 °C with FEP cable                                                                                     |  |
| Process pressure           | -1 bar ... +10 bar                                                                                                     | -1 bar ... +16 bar                                       | -                                                                                                                                         |  |
| Output signal              | 1 x PNP + 1 x PNP/NPN + 4 mA ...<br>20 mA / 0 V ... 10 V / 1 x PNP +<br>3 x PNP/NPN + 4 mA ... 20 mA /<br>0 V ... 10 V | 1 x PNP + 1 x PNP/NPN +<br>4 mA ... 20 mA / 0 V ... 10 V | Analog                                                                                                                                    |  |
| Accuracy of sensor element | ± 5 mm                                                                                                                 | ± 5 mm                                                   | ≤ ± 0.25 % of span for enhanced<br>version p ≥ 0.25 bar<br>≤ ± 0.5 % of span for standard<br>version and enhanced version<br>p < 0.25 bar |  |
| Measuring range            | 200 ... 2,000 mm (rod probe)<br>1,000, 2,000, 3,000, 4,000 mm<br>(rope probe)                                          | 200 mm ... 4,000 mm                                      | 0 bar ... 0.1 bar up to 0 bar ... 25<br>bar                                                                                               |  |

## At a glance

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|                      | <ul style="list-style-type: none"> <li>• Level sensor for fluids</li> <li>• No mechanical moving parts</li> <li>• Manually cutable and exchangeable probe or rope probe</li> <li>• Resistant to deposit formation</li> <li>• 3 in 1: combined display, analog output (acc. NAMUR NE 43) and binary output</li> <li>• High enclosure rating of IP67, rotatable housing and remote amplifier version</li> <li>• IO-Link</li> </ul>  | <ul style="list-style-type: none"> <li>• Level monitoring in hygienic applications</li> <li>• Manually cutable mono-probe with Ra ≤ 0.8 µm</li> <li>• CIP/SIP resistant</li> <li>• High enclosure rating IP67 and IP69K, autoclavable</li> <li>• Interchangeable hygienic process connections</li> <li>• 3 in 1: combined display, analog output and binary output</li> <li>• Remote amplifier version with compact process connection</li> <li>• IO-Link</li> </ul>  | <ul style="list-style-type: none"> <li>• Immersion depth up to 100 m</li> <li>• Available with various cable lengths</li> <li>• Stainless steel membrane</li> <li>• Hermetically sealed stainless steel housing with PA protection cap</li> <li>• Cable made from PUR, FEP-cable for aggressive media optionally available</li> <li>• Optional temperature measurement with integrated Pt100 element</li> <li>• Optional surge protection</li> </ul>  |  |
| Detailed information | → <a href="http://www.sick.com/LFP_Cubic">www.sick.com/LFP_Cubic</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                 | → <a href="http://www.sick.com/LFP_Inox">www.sick.com/LFP_Inox</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | → <a href="http://www.sick.com/LFH">www.sick.com/LFH</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |  |


**UP56**

Tough, non-contact, pressure-resistant


**UP56 Pure**

Pure reliability


**MHF15**

Simple, compact and robust

|                                                               |                                                             |                      |
|---------------------------------------------------------------|-------------------------------------------------------------|----------------------|
| Ultrasonic sensor                                             | Ultrasonic sensor                                           | Optical level switch |
| Non contact                                                   | Non contact                                                 | Contact              |
| Fluids                                                        | Fluids                                                      | Fluids               |
| Switch, continuous                                            | Switch, continuous                                          | Switch               |
| -25 °C ... +70 °C                                             | -25 °C ... +85 °C                                           | -25 °C ... +55 °C    |
| 0 bar ... 6 bar, gauge pressure                               | 0 bar ... 6 bar, gauge pressure, gauge pressure for mini    | -0.5 bar ... +16 bar |
| 1 x PNP + 4 mA ... 20 mA / 0 V ... 10 V<br>2 x PNP<br>2 x NPN | 1 x PNP + 4 mA ... 20 mA / 0 V ... 10 V /<br>4 mA ... 20 mA | 1 x PNP / 1 x NPN    |
| -                                                             | -                                                           | -                    |
| ≤ 3.4 m                                                       | ≤ 1,500 mm                                                  | -                    |

- Non-contact level measurement up to 3.4 m operating distance / 8.0 m limit scanning distance
- Pressure resistant up to 6 bar (87 psi)
- Transducer protected by PVDF cover for increased resistance
- 3 in 1: continuous level measurement, level switch and display
- Analog output switchable between 4 mA ... 20 mA and 0 V ... 10 V
- Process connector thread G 1 and G 2
- IP67 enclosure rating
- Easy to set parameters, also via connect+


[→ www.sick.com/UP56](http://www.sick.com/UP56)

- Ultrasonic level sensor with very high chemical resistance
- Non-contact measurement in immersion pipe of up to 1,500 mm
- PTFE-coated membrane and GF D40 process connection made of PTFE
- Pressure resistant up to 6 bar, temperature resistant up to 85 °C
- Different sizes available
- Analog output selectable between 4 mA to 20 mA and 0 V to 10 V
- Switching output for monitoring the maximum and minimum limit


[→ www.sick.com/UP56\\_Pure](http://www.sick.com/UP56_Pure)

- Robust level monitoring in liquid without additional requirements
- Small, compact design; no medium calibration required
- Process temperature up to 55 °C, process pressure up to 16 bar
- IP67 and IP69K enclosure rating
- Process connection G ½
- Highly medium resistant due to stainless steel housing 1.4404, polysulfone apex
- Output available as PNP or NPN transistor
- FDA-compliant, UL


[→ www.sick.com/MHF15](http://www.sick.com/MHF15)

|  |                                                                                   |                                                                                     |  |
|--|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
|  |  |  |  |
|  | <b>LFV200</b>                                                                     | <b>LFV300</b>                                                                       |  |
|  | The Point Level Sensor for all kinds of liquids                                   | Flexible and robust – Tuning Forks for all kinds of liquids                         |  |

## Technical data overview

|                            |                                          |                                                                                     |  |
|----------------------------|------------------------------------------|-------------------------------------------------------------------------------------|--|
| Measurement principle      | Vibrating level switch                   | Vibrating level switch                                                              |  |
| Detection principle        | Contact                                  | Contact                                                                             |  |
| Medium                     | Fluids                                   | Fluids                                                                              |  |
| Measurement                | Switch                                   | Switch                                                                              |  |
| Process temperature        | -40 °C ... +150 °C                       | -50 °C ... +250 °C                                                                  |  |
| Process pressure           | -1 bar ... +64 bar                       | -1 bar ... +64 bar                                                                  |  |
| Output signal              | Contactless electronic switch<br>1 x PNP | Contactless electronic switch<br>Double relay (DPDT)<br>1 x PNP/NPN<br>NAMUR signal |  |
| Accuracy of sensor element | ± 2 mm                                   | ± 2 mm                                                                              |  |

## At a glance

- Housing made of 316L stainless steel
- Two electrical output versions available
- Commissioning without filling
- Process temperature up to 150 °C
- Immune to deposit formation
- Very high repeatability
- Aseptic versions with polished surface, CIP and SIP resistant
- Tube extension up to 1,200 mm



- Several housing materials and electrical outputs available
- Commissioning without filling
- Process temperature up to 250 °C
- Immune to deposit formation
- Very high repeatability
- Aseptic versions according to EHEDG and FDA available, CIP and SIP resistant
- ATEX certification available
- Tube extension up to 6 m



Detailed information

→ [www.sick.com/LFV200](http://www.sick.com/LFV200)

→ [www.sick.com/LFV300](http://www.sick.com/LFV300)



**LBV300**

Tuning forks – tough and flexible in bulk solids



**LBV301**

Rugged, flexible and cleanable

|  |                               |  |                               |
|--|-------------------------------|--|-------------------------------|
|  | Vibrating level switch        |  | Vibrating level switch        |
|  | Contact                       |  | Contact                       |
|  | Bulk solids                   |  | Bulk solids                   |
|  | Switch                        |  | Switch                        |
|  | -50 °C ... +250 °C            |  | -50 °C ... +150 °C            |
|  | -1 bar ... +25 bar            |  | -1 bar ... +16 bar            |
|  | Contactless electronic switch |  | Contactless electronic switch |
|  | Double relay (DPDT)           |  | Double relay (DPDT)           |
|  | NAMUR signal                  |  | 1 x PNP/NPN                   |
|  | 1 x PNP/NPN                   |  | NAMUR signal                  |
|  | ± 10 mm                       |  | ± 10 mm                       |

- Tough device design
- Several housing materials and electrical outputs available
- Immune to deposit formation
- Commissioning without filling
- Process temperature up to 250 °C
- Very high repeatability
- ATEX versions (1D/2D/1G/2G) available
- Tube-extended version (LBV330) up to 6 m and rope-extended version (LBV320) up to 80 m available for vertical mounting



→ [www.sick.com/LBV300](http://www.sick.com/LBV300)

- Compact sensor from 1 in threaded
- Monoprobe design prevents bulk materials from sticking and jamming
- Polished monoprobe for food applications
- Commissioning without filling
- Process temperature up to 250 °C
- ATEX versions (1D/2D/1G/2G) available
- Tube-extended version (LBV331) up to 6 m and rope-extended version (LBV321) up to 80 m available for vertical mounting



→ [www.sick.com/LBV301](http://www.sick.com/LBV301)

|  |                                                                                   |                                                                                    |                                                                                     |  |
|--|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
|  |  |  |  |  |
|  | <b>PBS</b>                                                                        | <b>PBS Hygienic</b>                                                                | <b>PAC50</b>                                                                        |  |
|  | Universal pressure switch                                                         | The compact pressure switch for hygienic applications                              | Turns pressure into colors                                                          |  |

## Technical data overview

| Device type                                  | Pressure switch                                                             | Pressure switch                                                          | Pressure switch                                                                                 |  |
|----------------------------------------------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--|
| <b>Process pressure</b>                      |                                                                             |                                                                          |                                                                                                 |  |
| Gauge pressure                               | 0 bar ... 1 bar up to 0 bar ... 600 bar                                     | 0 bar ... 1 bar up to 0 bar ... 25 bar                                   | 0 bar ... 6 bar; 0 bar ... 10 bar                                                               |  |
| Absolute pressure                            | 0 bar ... 1 bar up to 0 bar ... 25 bar                                      | 0 bar ... 1 bar up to 0 bar ... 25 bar                                   | –                                                                                               |  |
| Compound pressure                            | –1 bar ... 0 bar up to –1 bar ... +24 bar                                   | –1 bar ... 0 bar up to –1 bar ... +24 bar                                | –1 bar ... 0 bar; –1 bar ... +1 bar; 0 bar ... +6 bar; 0 bar ... +10 bar; –1 bar ... 10 bar     |  |
| <b>Pressure unit</b>                         | Bar, MPa, psi and kg/cm <sup>2</sup>                                        | Bar, MPa, psi and kg/cm <sup>2</sup>                                     | –                                                                                               |  |
| <b>Accuracy</b>                              | ≤ ± 1 % of span                                                             | ≤ ± 1 % of span                                                          | ≤ ± 1.5 % of span<br>≤ ± 2 % of span incl. temperature error                                    |  |
| <b>Setting accuracy of switching outputs</b> | ≤ ± 0.5 % of span                                                           | ≤ ± 0.5 % of span                                                        | ≤ ± 0.2 % of span                                                                               |  |
| <b>Output signal</b>                         | Switching outputs PNP or NPN plus optional IO-Link and analog output signal | Switching outputs PNP or NPN, analog output signal plus optional IO-Link | Configurable switching outputs PNP, NPN or push-pull analog output signal plus optional IO-Link |  |
| <b>Electrical connection</b>                 | Round connector M12 x 1                                                     | Round connector M12 x 1                                                  | Round connector M12 x 1                                                                         |  |

## At a glance

|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | <ul style="list-style-type: none"> <li>• Electronic pressure switch with display for monitoring pressure in liquids and gases</li> <li>• Precise sensor technology with stainless steel membrane</li> <li>• Integrated process connections manufactured from high-quality stainless steel</li> <li>• Pressure values indicated on display. Output states are indicated separately via wide-angle LEDs.</li> <li>• Unit of pressure value in display can be switched</li> </ul>  | <ul style="list-style-type: none"> <li>• Hygienically-graded pressure switch with display for the food and beverage industry</li> <li>• Wetted parts are made from stainless steel 1.4435</li> <li>• Pressure values are indicated on the display</li> <li>• Unit of pressure value in the display can be switched</li> <li>• Output states are indicated separately via large LEDs</li> </ul>  | <ul style="list-style-type: none"> <li>• Electronic pressure switch for pneumatic applications</li> <li>• Large display shows system pressure, output states and set switching points</li> <li>• Three large function keys and intuitive menu navigation</li> <li>• Installation on a mounting rail, wall or in a control panel</li> </ul>  |  |
|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|

Detailed information

→ [www.sick.com/PBS](http://www.sick.com/PBS)

→ [www.sick.com/PBS\\_Hygienic](http://www.sick.com/PBS_Hygienic)

→ [www.sick.com/PAC50](http://www.sick.com/PAC50)


**PBT**

All-around pressure transmitter


**PFT**

The flexible solution


**PHT**

A clean solution


**PET**

If one is not enough

| Pressure transmitter                                                                              | Pressure transmitter                                                            | Pressure transmitter                                                            | Pressure transmitter                                                                                          |
|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| 0 bar ... 1 bar up to bar ...<br>600 bar                                                          | 0 bar ... 0.1 bar up to 0 bar ...<br>600 bar                                    | 0 bar ... 0.25 bar up to 0 bar ...<br>25 bar                                    | 0 bar ... 6 bar up to 0 bar ...<br>600 bar                                                                    |
| 0 bar ... 1 bar up to 0 bar ...<br>25 bar                                                         | 0 bar ... 0.25 bar up to 0 bar ...<br>25 bar                                    | 0 bar ... 0.25 bar up to 0 bar ...<br>16 bar                                    | –                                                                                                             |
| –1 bar ... 0 bar up to –1 bar ...<br>+24 bar                                                      | –1 bar ... 0 bar up to –1 bar ...<br>+30 bar                                    | –1 bar ... 0 bar up to –1 bar ...<br>+15 bar                                    | –1 bar ... +5 bar up to –1 bar ...<br>+59 bar                                                                 |
| Bar, MPa, psi and kg/cm <sup>2</sup><br>≤ ± 1 % of span<br>≤ ± 0.5 % of span<br>≤ ± 0.6 % of span | Bar, MPa, psi and kg/cm <sup>2</sup><br>≤ ± 0.5 % of span<br>≤ ± 0.25 % of span | Bar, MPa, psi and kg/cm <sup>2</sup><br>≤ ± 0.5 % of span<br>≤ ± 0.25 % of span | Bar, psi, kg/cm <sup>2</sup> , kPa and Mpa<br>≤ ± 1.2 % of span (at room<br>temperature)<br>≤ ± 1.2 % of span |
| –                                                                                                 | –                                                                               | –                                                                               | –                                                                                                             |
| Analog                                                                                            | Analog                                                                          | Analog                                                                          | Analog                                                                                                        |
| Round connector M12 x 1, L-<br>connector, flying leads                                            | Round connector M12 x 1, L-<br>connector, flying leads                          | Round connector M12 x 1,<br>L-connector, flying leads, field<br>housing         | Round connector M12 x 1, 4-pin,<br>for L-connector according to<br>DIN EN 175301-803 A (without<br>plug)      |

- A large variety of available process connections
- No moving parts: No mechanical wear, fatigue-proof, maintenance-free
- Circularly welded, hermetically sealed stainless steel membrane
- Electrical connection M12 x 1, L-connector acc. to DIN 175301-803 A or flying leads


→ [www.sick.com/PBT](http://www.sick.com/PBT)

- Variant with flush-mounted membrane available
- Process temperature up to 150 °C (optional)
- Large variety of commonly used process connections
- High shock and vibration resistance
- Accuracy 0.5 % or 0.25 %
- Zero and span adjustable
- Electrical connection M12 x 1, L-connector according to DIN 175301-803 A or flying leads



→ [www.sick.com/PFT](http://www.sick.com/PFT)

- Robust and precise pressure measurement technology
- Flush-mounted, hermetically sealed stainless steel membrane with roughness Ra < 0.4 µm
- Wetted parts stainless steel 1.4435, housing stainless steel 1.4571
- CIP/SIP resistant
- Large range of hygienic process connectors
- Stainless steel housing with enclosure rating of up to IP 68


→ [www.sick.com/PHT](http://www.sick.com/PHT)

- Various output signals and electrical connections available
- Common process connections available
- High overpressure safety. Pressure peak protection available upon request for selected process connections.
- Circularly welded, hermetically sealed stainless steel membrane
- Stainless steel housing with enclosure rating up to IP 67


→ [www.sick.com/PET](http://www.sick.com/PET)


|  |                                                                                   |                                                                                    |                                                                                     |  |
|--|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
|  |  |  |  |  |
|  | <b>TBS</b>                                                                        | <b>TBT</b>                                                                         | <b>TCT</b>                                                                          |  |
|  | Temperature monitoring made easy                                                  | Well-proven temperature measurement                                                | Compact, rugged, precise                                                            |  |

## Technical data overview

|                                             |                                                                                   |                                                                                                   |                                                                                                  |  |
|---------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--|
| Process temperature                         | -20 °C ... +80 °C                                                                 | -50 °C ... +150 °C<br>-50 °C ... +250 °C                                                          | -50 °C ... +150 °C<br>-50 °C ... +250 °C                                                         |  |
| Accuracy of sensor element                  | $\leq \pm (0.15 \text{ °C} + 0.002  t )$                                          | Class A according to IEC 60751                                                                    | Class A according to IEC 60751                                                                   |  |
| Accuracy of optional transmitter            | -                                                                                 | $\leq \pm 0.1 \%$ of span                                                                         | $\leq \pm 0.2 \%$ of span                                                                        |  |
| Signal outputs and maximum ohmic load $R_A$ | Transistor outputs PNP/NPN, optional analog output 4 mA ... 20 mA or 0 V ... 10 V | Pt100, 4-wire, 4 mA ... 20 mA, 2-wire ( $R_A \leq (L^* - 10 \text{ V}) / 0.028 \text{ A [Ohm]}$ ) | Pt100, 4-wire, 4 mA ... 20 mA, 2-wire ( $R_A \leq (L^* - 9 \text{ V}) / 0.023 \text{ A [Ohm]}$ ) |  |
| Electrical connection                       | Round connector M12 x 1, 4-pin<br>Round connector M12 x 1, 5-pin                  | Cable gland M16 x 1.5, IP 65<br>Cable gland M16 x 1.5, IP 67                                      | Round connector M12 x 1, 4-pin, IP 67, L-connector (DIN EN 175301-803 A), 4 pin, IP 65           |  |

## At a glance

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|                      | <ul style="list-style-type: none"> <li>• Large display</li> <li>• Individually programmable transistor outputs PNP or NPN, optional analog output 4 mA ... 20 mA or 0 V ... 10 V</li> <li>• Round connector M12 x 1</li> <li>• Measuring ranges -20 °C ... +80 °C</li> <li>• Pt1000 element, accuracy class A (IEC 60751)</li> <li>• Various insertion lengths and connection threads</li> <li>• Wetted parts made from corrosion-resistant stainless steel 1.4571</li> <li>• Enclosure rating IP 65 and IP 67</li> <li>• IO-Link</li> </ul>  | <ul style="list-style-type: none"> <li>• Pt100 element, accuracy class A according to IEC 60751</li> <li>• Measuring ranges -50 °C ... +150 °C and -50 °C ... +250 °C</li> <li>• Wetted parts made from corrosion resistant stainless steel 1.4571</li> <li>• Various mechanical adaptations and insertion lengths</li> <li>• Pt100 (4-wire) or 4 mA ... 20 mA (2-wire)</li> <li>• Cable gland M16 x 1.5</li> </ul>  | <ul style="list-style-type: none"> <li>• Pt100 element, accuracy class A according to IEC 60751</li> <li>• Measuring ranges -50 °C ... +150 °C and -50 °C ... +250 °C</li> <li>• Wetted parts made from corrosion resistant stainless steel 1.4571</li> <li>• Various mechanical adaptations and insertion lengths, also available with thermowell</li> <li>• Pt100 (4-wire) or 4 mA ... 20 mA (2-wire)</li> <li>• Circular connector M12 x 1 (IP 67) or L-connector according to DIN EN 175301-803 A (IP 65)</li> </ul>  |  |
| Detailed information | → <a href="http://www.sick.com/TBS">www.sick.com/TBS</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | → <a href="http://www.sick.com/TBT">www.sick.com/TBT</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                 | → <a href="http://www.sick.com/TCT">www.sick.com/TCT</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |

|                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>TSP</b><br>Efficient and space saving temperature measurement                                                                                                                                                                                                                                                                                                                                                                             | <b>THTS</b><br>Simple, hygienic temperature measurement                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <b>THTE</b><br>Hygienic and flexible: Temperature sensor with protection tube                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <b>THTL</b><br>Perfect fit: Hygienic temperature measurement in pipes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| -30 °C ... +130 °C<br><br>Class B according to IEC 60751<br>-<br><br>Pt100, 2-wire or Pt1000, 2-wire<br>Pt100, 3-wire or Pt1000, 3-wire<br><br>Round connector M12 x 1, 4-pin, IP 67                                                                                                                                                                                                                                                         | -50 °C ... +150 °C<br>-50 °C ... +250 °C<br><br>Class A according to IEC 60751<br>$\leq \pm 0.2 \% \text{ of span}$<br><br>Pt100, 4-wire, 4 mA ... 20 mA, 2-wire ( $R_A \leq (L^* - 10 \text{ V}) / 0.023 \text{ A [Ohm]}$ )<br><br>Round connector M12 x 1, 4-pin                                                                                                                                                                                                                                                          | -50 °C ... +150 °C<br>-50 °C ... +250 °C<br><br>Class A according to IEC 60751<br>$\leq \pm 0.2 \% \text{ of span}$<br><br>Pt100, 4-wire, 4 mA ... 20 mA, 2-wire ( $R_A \leq (L^* - 10 \text{ V}) / 0.023 \text{ A [Ohm]}$ )<br><br>Round connector M12 x 1, 4-pin                                                                                                                                                                                                                                                                       | -50 °C ... +150 °C<br><br>Class A according to IEC 60751<br>$\leq \pm 0.2 \% \text{ of span}$<br><br>Pt100, 4-wire, 4 mA ... 20 mA, 2-wire ( $R_A \leq (L^* - 10 \text{ V}) / 0.023 \text{ A [Ohm]}$ )<br><br>Round connector M12 x 1, 4-pin                                                                                                                                                                                                                                                                                                                      |
| <ul style="list-style-type: none"> <li>Platinum element (Pt100 or Pt1000, 2-wire or 3-wire), accuracy class B according to IEC 60751</li> <li>Measuring range -30 °C ... +130 °C</li> <li>Various connection threads and insertion lengths</li> <li>Wetted parts made from stainless steel 1.4305</li> <li>Circular connector M12 x 1 (IP 67)</li> </ul>  | <ul style="list-style-type: none"> <li>Pt100 element, accuracy class A (IEC 60751)</li> <li>Measuring ranges -50 °C ... +150 °C and -50 °C ... +250 °C</li> <li>Wetted parts: Corrosion-resistant stainless steel 316L/1.4435, <math>R_a \leq 0.8 \mu\text{m}</math></li> <li>Various hygienic process connections and insertion lengths</li> <li>Pt100 (4-wire) or 4 mA ... 20 mA (2-wire)</li> <li>Round connector M12 x 1</li> </ul>  | <ul style="list-style-type: none"> <li>Pt100, accuracy class A (IEC 60751)</li> <li>Measuring ranges -50 °C ... +150 °C and -50 °C ... +250 °C</li> <li>Sensor probe spring-loaded in thermowell</li> <li>Wetted parts: Corrosion-resistant stainless steel 316L/1.4435, <math>R_a \leq 0.8 \mu\text{m}</math></li> <li>Hygienic process connections</li> <li>Pt100 (4-wire) or 4 mA ... 20 mA (2-wire)</li> <li>Round connector M12 x 1</li> </ul>  | <ul style="list-style-type: none"> <li>Pt100, accuracy class A (IEC 60751)</li> <li>Measuring ranges -50 °C ... +150 °C and -50 °C ... +250 °C</li> <li>In-line housing for orbital welding in pipe</li> <li>Sensor probe spring-loaded in thermowell</li> <li>Wetted parts: Corrosion-resistant</li> <li>Stainless steel 316L/1.4435, <math>R_a \leq 0.8 \mu\text{m}</math></li> <li>Pt100 (4-wire) or 4 mA ... 20 mA (2-wire)</li> <li>Round connector M12 x 1</li> </ul>  |
| <a href="http://www.sick.com/TSP">→ www.sick.com/TSP</a>                                                                                                                                                                                                                                                                                                                                                                                     | <a href="http://www.sick.com/THTS">→ www.sick.com/THTS</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <a href="http://www.sick.com/THTE">→ www.sick.com/THTE</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <a href="http://www.sick.com/THTL">→ www.sick.com/THTL</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |


|                                                                                   |                                                                                    |                                                                                     |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
| <b>FFU</b>                                                                        | <b>DOSIC®</b>                                                                      | <b>Bulkscan® LMS511</b>                                                             |
| Non-contact flow measurement                                                      | The compact stainless-steel sensor for flexible flow measurement                   | Non-contact and maintenance-free sensor for measuring volume flow                   |

| Technical data overview            |                                                                                                                                                                       |                                                                                                                                                                |                                                                                             |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| Measurement principle              | Ultrasonic sensor                                                                                                                                                     | Ultrasonic sensor                                                                                                                                              | Laser run time technology                                                                   |
| Medium                             | Fluids                                                                                                                                                                | Conductive and non-conductive liquids                                                                                                                          | Bulk solids                                                                                 |
| Output signal                      | Analog output: 4 mA ... 20 mA, 0 mA ... 20 mA<br>1 pulse/status output<br>Analog output: 4 mA ... 20 mA, 0 mA ... 20 mA<br>2 pulse/status output<br>1 switching input | 1 x analog output: 4 mA ... 20 mA, 2 x digital input or output (configurable)<br>2 x analog output: 4 mA ... 20 mA, 2 x digital input or output (configurable) | Ethernet TCP/IP<br>Switching inputs and outputs<br>USB auxiliary interface<br>RS-232/RS-422 |
| Nominal width measuring tube       | NW 10<br>NW 15<br>NW 20<br>NW 25                                                                                                                                      | DN 15 / DN 25                                                                                                                                                  | -                                                                                           |
| Max. conveyor speed                | -                                                                                                                                                                     | -                                                                                                                                                              | ≤ 30 m/s                                                                                    |
| Maximum adjustable measuring range | 0 l/min ... 240 l/min                                                                                                                                                 | 0 l/min ... 250 l/min                                                                                                                                          | -                                                                                           |

| At a glance          |                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                      | <ul style="list-style-type: none"> <li>Flow sensor for conductive and non-conductive liquids</li> <li>Compact design with no moving parts</li> <li>Process temperature up to 80 °C, process pressure up to 16 bar</li> <li>High chemical resistance due to seal-free sensor design</li> <li>Large display with membrane keyboard</li> <li>Integrated teaching tube detection</li> </ul> | <ul style="list-style-type: none"> <li>Flow measurement for water and oil-based liquids</li> <li>Seal-free stainless-steel 316L sensor with <math>Ra \leq 0.8</math></li> <li>Straight, self-draining measuring tube</li> <li>Compact design with short installation lengths</li> <li>Configurable digital outputs</li> <li>Temperature measurement</li> <li>IP 67/69 enclosure rating, CIP/SIP-compatible, IO-Link version 1.1</li> </ul> | <ul style="list-style-type: none"> <li>Non-contact measurement of volume and mass flow of bulk material</li> <li>Laser pulses with high angular resolution ensure outstanding image resolution</li> <li>5-echo pulse evaluation produces highly reliable measurements</li> <li>Offers non-contact belt monitoring</li> <li>Integrated center-of-gravity calculator</li> <li>Robust structure for harsh ambient conditions</li> <li>Can also measure at low temperatures thanks to integrated heater</li> <li>IP67 enclosure rating</li> </ul> |
|                      |                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Detailed information | → <a href="http://www.sick.com/FFU">www.sick.com/FFU</a>                                                                                                                                                                                                                                                                                                                                | → <a href="http://www.sick.com/DOSIC">www.sick.com/DOSIC</a>                                                                                                                                                                                                                                                                                                                                                                               | → <a href="http://www.sick.com/Bulkscan_LMS511">www.sick.com/Bulkscan_LMS511</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

## REGISTER AT WWW.SICK.COM TODAY AND ENJOY ALL THE BENEFITS

- ✓ Select products, accessories, documentation and software quickly and easily.
- ✓ Create, save and share personalized wish lists.
- ✓ View the net price and date of delivery for every product.
- ✓ Requests for quotation, ordering and delivery tracking made easy.
- ✓ Overview of all quotations and orders.
- ✓ Direct ordering: submit even very complex orders in moments.
- ✓ View the status of quotations and orders at any time. Receive e-mail notifications of status changes.
- ✓ Easily repeat previous orders.
- ✓ Conveniently export quotations and orders to work with your systems.

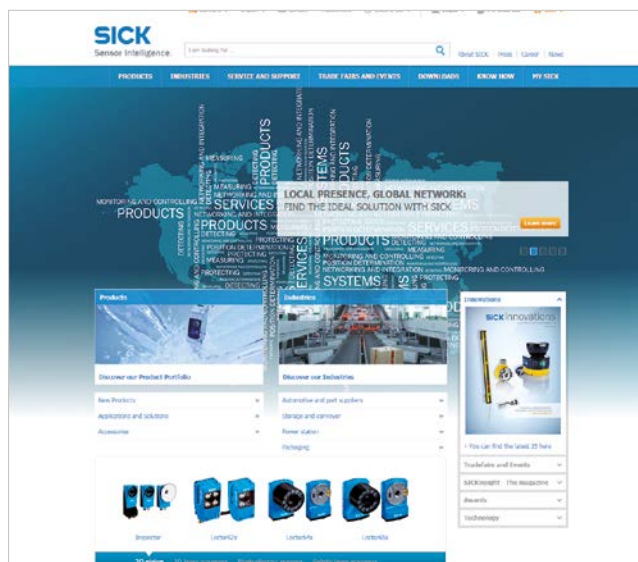

## SERVICES FOR MACHINES AND SYSTEMS: SICK LifeTime Services

Our comprehensive and versatile LifeTime Services are the perfect addition to the comprehensive range of products from SICK. The services range from product-independent consulting to traditional product services.



-  **Consulting and design**  
Safe and professional
-  **Product and system support**  
Reliable, fast and on-site
-  **Verification and optimization**  
Safe and regularly inspected
-  **Upgrade and retrofits**  
Easy, safe and economical
-  **Training and education**  
Practical, focused and professional

## SICK AT A GLANCE

SICK is a leading manufacturer of intelligent sensors and sensor solutions for industrial applications. With more than 8,000 employees and over 50 subsidiaries and equity investments as well as numerous agencies worldwide, we are always close to our customers. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in various industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services round out our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

### Worldwide presence:

Australia, Austria, Belgium, Brazil, Canada, Chile, China, Czech Republic, Denmark, Finland, France, Germany, Great Britain, Hungary, Hong Kong, India, Israel, Italy, Japan, Malaysia, Mexico, Netherlands, New Zealand, Norway, Poland, Romania, Russia, Singapore, Slovakia, Slovenia, South Africa, South Korea, Spain, Sweden, Switzerland, Taiwan, Thailand, Turkey, United Arab Emirates, USA, Vietnam.

Detailed addresses and further locations → [www.sick.com](http://www.sick.com)