




Pushing Performance

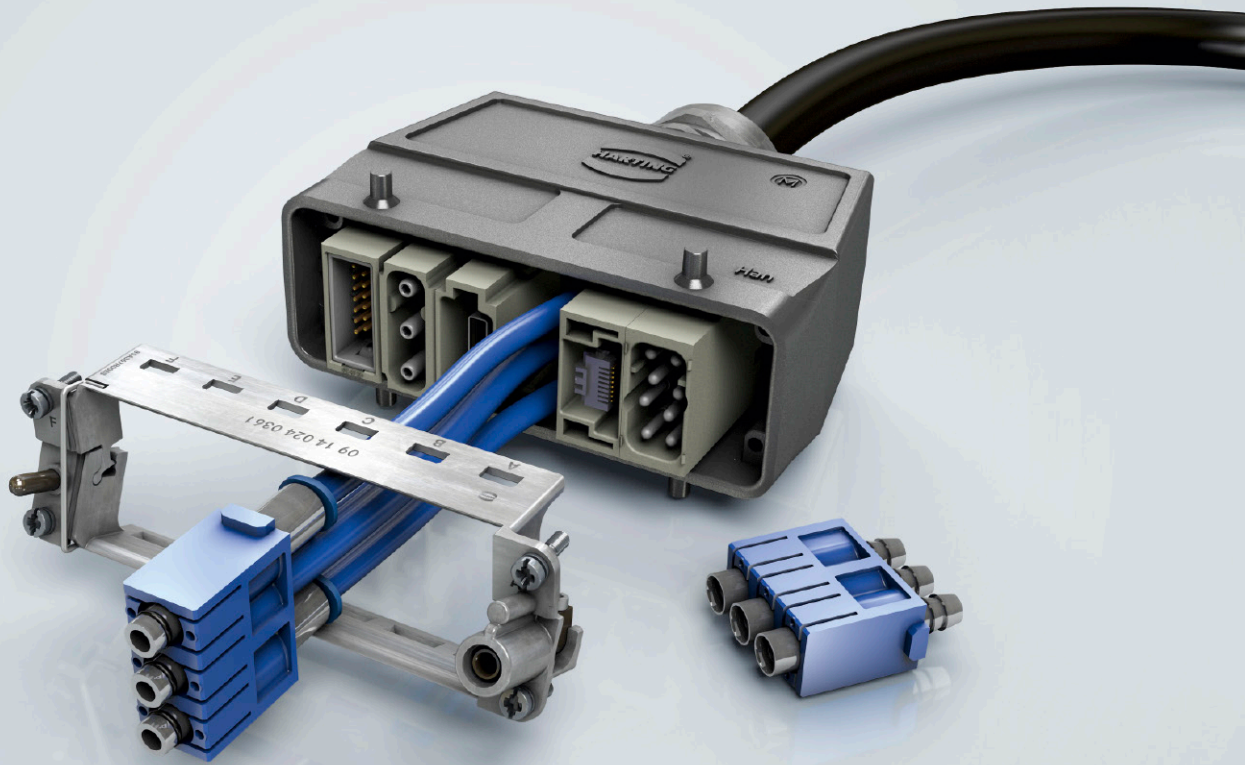


People | Power | Partnership

HARTING Selection Guide

Han-Modular® Connectors

Description of the Han-Modular® system

The Han-Modular® series is designed for combining different transmission media in one connector. The multifaceted system of inserts, contacts, frames, hoods and housings as well as accessories fulfils individual customer requirements. The customer can choose between more than 100 different modules. These are suitable for different transmission media and cover various termination techniques. The patented Han-Modular® hinged frame enables the configuration of all modules in the well-accepted Han® hoods and housings.




Further additional solutions are available, e.g. suitable docking frames for drawer units. Individual customer requirements can be realised by means of the Han-Modular® series. Combining various transmission media in one single connector results in lower expenditures in installation time and production downtime. Space savings and cost savings are further benefits. The easy extension possibilities secure the ideal solution for an actual as well as future safe design.

Highlights

- Combination of different connectors to one unit**
- Shorter installation times**
- Important space saving**
- Save money for components as well as for the whole industrial site**
- Future safe design due to easy extensions**

System description

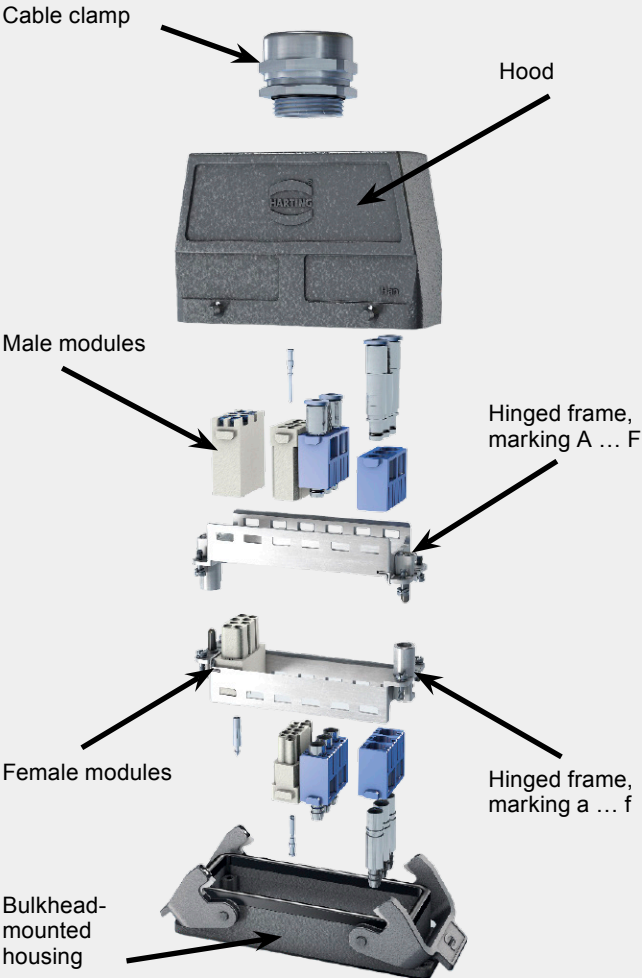


Technical characteristics

Specifications and approvals	
- DIN EN 61984 / DIN EN 60664-1	
- UL File No. E235076 / E318390	
- DNV GL Certificate No. TAE00003MY / TAA00002EU	
PE system (hinged frame)	2 leading PE contacts
- Signal side	0.5 ... 2.5 mm²
- Power side	4 ... 10 mm²
	(10 mm² with crimp tool 09 99 000 0374)
Limiting temperatures*	- 40 °C ... + 125 °C
Flammability acc. to UL 94	V0
Working life	
- Standard version	> 500 mating cycles
- HMC version	> 10.000 mating cycles
Material	
- Hinged frames	zinc die cast
- Modules	polycarbonate
- Contacts	copper alloy
* Some modules have a lower limiting temperature (i.e. pneumatic, optical as well as data transmission modules)	

Configuration of the Han-Modular® connectors

Use the Han® Online Configurator and quickly and easily assemble your Han-Modular® interface and benefit from the advantages.

- Ensure the compatibility of the components with each other
- Selection always in view through interactive 3D visualization
- Documentation via download package for the complete interface
- Working in a team using the save, load and share function



You can find the Han® configurator at: www.harting.com/configurator

Hinged Frames Plus

New Hinged Frames Plus – Established products even better



Suitable for more than 100 different modules



Quick and easy assembly supported by an audible “Click”




Very high mechanical stability



No tools for insertion and removal



2 leading PE contacts

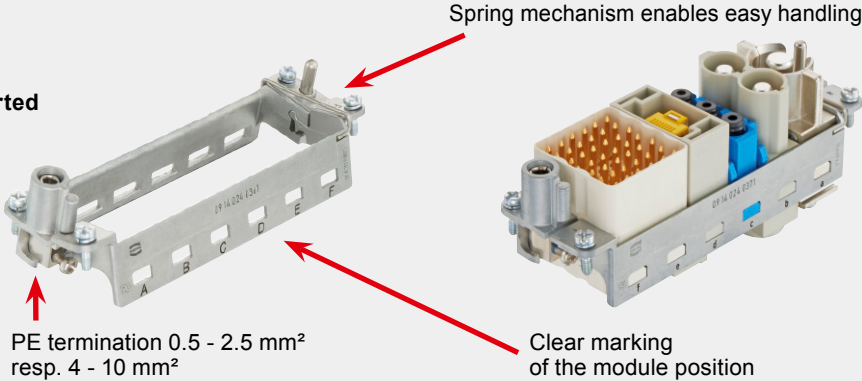

Size	Hinged frames 6 B	Hinged frames 10 B	Hinged frames 16 B	Hinged frames 24 B
Number of modules	for 2 modules	for 3 modules	for 4 modules	for 6 modules
Standard version (A ... F)	09 14 006 0361	09 14 010 0361	09 14 016 0361	09 14 024 0361
Standard version (a ... f)	09 14 006 0371	09 14 010 0371	09 14 016 0371	09 14 024 0371
Han® HMC version (A ... F)	09 14 206 0303	09 14 210 0303	09 14 216 0303	09 14 224 0303
Han® HMC version (a ... f)	09 14 206 0313	09 14 210 0313	09 14 216 0313	09 14 224 0313

Accessories


Size	Han-Modular® Guard for hinged frames plus	Coding element Han® 6 B - 24 B	Guide pins / bushes Han® 6 B - 24 B	Han® 10 A frame for 1 module
Note	Guiding, colour coding, protection	6 codings	16 codings	
Part number	09 14 000 999x	09 14 000 9901	Male: 09 14 000 9908 Female: 09 14 000 9909	09 14 000 0304

* for pneumatic, optical as well as small contacts (≤ 5 A) guide pins and bushes are recommended

Docking frame

Docking frame

- Docking connector for drawer systems
- Robust, leading guide pins and bushes
- Cost saving polycarbonate frames
- Compatible with HMC up to 10.000 mating cycles
- Large tolerance compensation of ± 2 mm play (float mount with M4 adapter plate 09 14 000 9936)

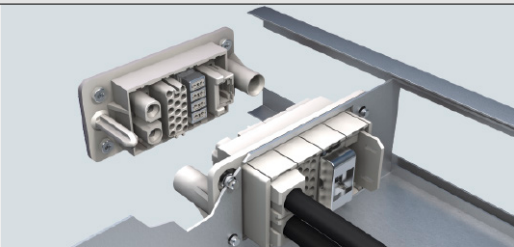

Size	Docking frames 6 B	Docking frames 10 B	Docking frames 16 B	Docking frames 24 B
Number of modules	for 2 modules	for 3 modules	for 4 modules	for 6 modules
Dimensions	65.8 x 33 mm	79.3 x 45 mm	94 x 45 mm	123.4 x 45 mm
float mounting (A ... F)	09 14 006 1701	09 14 010 1701	09 14 016 1701	09 14 024 1701
fix mounting (a ... f)	09 14 006 1711	09 14 010 1711	09 14 016 1711	09 14 024 1711
Cover		09 14 010 5701	09 14 016 5701	09 14 024 5701

Han-Modular® Hoods/Housings



Han-Modular® Hoods/Housings		Han-Modular® Compact	Han-Modular® Twin	Han-Modular® Eco	Han-Modular® Eco
	Hoods/Housings type Number of modules PE termination	Metal hoods/housings IP65 1 module 0.5 ... 10 mm²	Metal hoods/housings IP65 2 modules 0.5 ... 10 mm²	Plastic hoods/housings IP65 1 module without PE	Plastic hoods/housings IP65 1 module Pin 1 = PE
	Hoods - Carrier hoods - Hood side entry M25 - Hood top entry M25 - Hood top entry M32 - Cover	09 14 001 0311 19 14 001 0501 19 14 001 0401 19 14 001 0402 09 14 001 5402	09 14 002 0311 19 14 002 0501 19 14 002 0401 19 14 002 0402	09 14 001 0420	09 14 001 0421
	Housings - Bulkhead-mounted housing - Cable to cable housing - Cover	09 14 001 0301 19 14 001 0301 + Hood 09 14 001 5401	09 14 002 0301 19 14 002 0301 + Hood 09 14 002 5401	09 14 001 0320 09 14 001 0720	09 14 001 0321 09 14 001 0721
	Coding elements	09 14 000 997x		09 14 000 9929	09 14 000 9929
Han-Modular® Hoods/Housings		Han-Eco® Modular	Han-Yellock®	Han-Modular® Flexbox	Module clamp
	Hoods/Housings type Locking element Field of application Number of modules	Plastic hoods/housings IP65 Plastic levers Industrial applications 3, 4, 5, 7 modules	Metal hoods/housings IP65 Press-button Industrial applications 2, 4 modules	Plastic hoods/housings IP54 screw locking e.g. energy chain up to 4 x 4 modules	Plastic mounting frame IP20 Snap locking within switch cabinet 1 module
	Part numbers	19 41 ...	11 ...	09 14 000 8...	09 14 000 0312 09 14 000 0313
Hoods/housings for hinged frame		Han® B	Han® EMV	Han® M	Han® HPR
	Hoods/Housings type Locking element Field of application	Metal hoods/housings IP65 Han-Easy Lock® Industrial applications	Metal hoods/housings IP65 Han-Easy Lock® shielded connections	Metal hoods/housings IP65 Stainless steel levers Outdoor applications	Metal hoods/housings IP68 Screw locking Rail technology
	Sizes: - Han® 6 B for 2 modules - Han® 10 B for 3 modules - Han® 16 B for 4 modules - Han® 24 B for 6 modules				
	Part numbers	09 30 ... / 19 30 ...	09 62 ... / 19 62 ...	09 37... / 19 37...	09 40 ... / 19 40 ...
Hoods/housings for hinged frame		Han® HMC	Han-Snap®	Grip panel	Docking frame
	Hoods/Housings type Locking element Field of application	Metal hoods/housings IP65 Han-Easy Lock® up to 10.000 mating cycles	Plastic adapter IP20 Snap locking within switch cabinet	Metal mounting frame IP20 Screw locking within switch cabinet	Metal frame IP20 without locking for drawer systems
	Sizes: - Han® 6 B for 2 modules - Han® 10 B for 3 modules - Han® 16 B for 4 modules - Han® 24 B for 6 modules				
	Part numbers	09 30 2 ... / 19 30 2 ...	09 33 ...	09 00 0xx 56 ...	09 30 0xx 1704

For more details and part numbers refer to catalogue “Industrial Connectors Han®” as well as the HARTING eCatalogue

Crimp Contacts and Crimping Tools
















5 A – D-Sub	Cross-section / Wire gauge				male	female	male	female
	(mm²)	(AWG)			(gold plated)	(gold plated)	(HMC gold plated)	(HMC gold plated)
	0.09 - 0.25	28 - 24			09 67 000 7576	09 67 000 7476	09 67 000 7570	09 67 000 7470
	0.13 - 0.33	26 - 22			09 67 000 5576	09 67 000 5476	09 67 000 5570	09 67 000 5470
10 A – Han D®	Cross-section / Wire gauge		male	female	male	female	male	female
	(mm²)	(AWG)	(silver plated)	(silver plated)	(gold plated)	(gold plated)	(HMC gold plated)	(HMC gold plated)
	0.14 - 0.37	26 - 22	09 15 000 6104	09 15 000 6204	09 15 000 6124	09 15 000 6224	09 15 200 6124	09 15 200 6224
	0.5	20	09 15 000 6103	09 15 000 6203	09 15 000 6123	09 15 000 6223	09 15 200 6123	09 15 200 6223
	0.75	18	09 15 000 6105	09 15 000 6205	09 15 000 6125	09 15 000 6225	09 15 200 6125	09 15 200 6225
	1	18	09 15 000 6102	09 15 000 6202	09 15 000 6122	09 15 000 6222	09 15 200 6122	09 15 200 6222
16 A – Han E®	Cross-section / Wire gauge		male	female	male	female	male	female
	(mm²)	(AWG)	(silver plated)	(silver plated)	(gold plated)	(gold plated)	(HMC gold plated)	(HMC gold plated)
	0.14 - 0.37	26 - 22	09 33 000 6127	09 33 000 6227	09 33 000 6117	09 33 000 6217	09 33 200 6117	09 33 200 6217
	0.5	20	09 33 000 6121	09 33 000 6220	09 33 000 6122	09 33 000 6222	09 33 200 6122	09 33 200 6222
	0.75	18	09 33 000 6114	09 33 000 6214	09 33 000 6115	09 33 000 6215	09 33 200 6115	09 33 200 6215
	1	18	09 33 000 6105	09 33 000 6205	09 33 000 6118	09 33 000 6218	09 33 200 6118	09 33 200 6218
40 A – Han® C	Cross-section / Wire gauge		male	female			male	female
	(mm²)	(AWG)	(silver plated)	(silver plated)			(HMC gold plated)	(HMC gold plated)
	1.5	16	09 32 000 6104	09 32 000 6204			09 32 200 6114	09 32 200 6224
	2.5	14	09 32 000 6105	09 32 000 6205			09 32 200 6115	09 32 200 6225
	4	12	09 32 000 6107	09 32 000 6207			09 32 200 6117	09 32 200 6227
	6	10	09 32 000 6108	09 32 000 6208			09 32 200 6118	09 32 200 6228
Crimping tools	Crimping tools acc. to IEC 60352-2		09 99 000 0501	09 99 000 0021	09 99 000 0110	09 99 000 0377	09 99 000 0888	
	Contacts / cross-section [mm²]		D-Sub / 0.09 ... 0,82	Han D® / 0.14 ... 1.5 Han E® / 0.5 ... 2.5	Han D® / 0.14 ... 1.5 Han E® / 0.5 ... 4.0 Han® C / 1.5 ... 4.0	Han® C / 4.0 ... 10.0	Han D® / 0.14 ... 2.5 Han E® / 0.14 ... 4.0 Han® C / 1.5 ... 4.0	
Han® HC	Cross-section / Wire gauge		male	female	Crimp dies acc. to DIN 46235	Battery hydraulic crimping tool (10 - 70 mm²)		Hydraulic handtool (10 - 70 mm²)
	(mm²)	(AWG)	(silver plated)	(silver plated)				
						09 99 000 0850		09 99 000 0851
70 A	10		09 11 000 6131	09 11 000 6231	09 99 000 0852			
	16		09 11 000 6132	09 11 000 6232	09 99 000 0853			
	25		09 11 000 6133	09 11 000 6233	09 99 000 0854			
100 A	10		09 11 000 6114	09 11 000 6214	09 99 000 0852			
	16		09 11 000 6116	09 11 000 6216	09 99 000 0853			
	25		09 11 000 6125	09 11 000 6225	09 99 000 0854			
	35		09 11 000 6135	09 11 000 6235	09 99 000 0855			
200 A	25		09 11 000 6120	09 11 000 6220	09 99 000 0854			
	35		09 11 000 6121	09 11 000 6221	09 99 000 0855			
	50		09 11 000 6122	09 11 000 6222	09 99 000 0856			
	70		09 11 000 6123	09 11 000 6223	09 99 000 0857			

100 - 200 A		Han® 200 A Axial Module	Han® 200 A PE Module	Han® 100 A Axial Module	Han® PE Module
	Number of contacts	1*	1 x PE*	1*	1 x PE
	Electrical data	200 A / 1000 V	200 A	100 A / 1000 V	100 A
	Termination type	Axial screw termination	Axial screw termination	Axial screw termination	Axial screw termination
	Cross-section	40 ... 70 mm ²	40 ... 70 mm ²	16 ... 35 mm ²	16 ... 35 mm ²
	Male module (M)	09 14 001 2662	09 14 001 2667	09 14 002 2651	09 14 001 2633
	Female module (F)	09 14 001 2762	09 14 001 2767	09 14 002 2751	09 14 001 2733
	Cross-section	25 ... 40 mm ²	25 ... 40 mm ²	10 ... 25 mm ²	10 ... 25 mm ²
	Male module (M)	09 14 001 2663	09 14 001 2668	09 14 002 2653	09 14 001 2632
	Female module (F)	09 14 001 2763	09 14 002 2768	09 14 002 2753	09 14 001 2732
40 - 70 A		Han® 70 A Axial module	Han® 70 A Hybrid module	Han® 40 A Axial module	Han® C Axial module
	Number of contacts	2	1 + (4 x Han E®)	2	3
	Electrical data	70 A / 1000 V	70 A / 1000 V	40 A / 1000 V	40 A / 690 V
	Termination type	Axial screw termination	Axial screw termination	Axial screw termination	Axial screw termination
	Cross-section	14 ... 22 mm ²	14 ... 22 mm ²	6 ... 10 mm ²	6 ... 10 mm ²
	Male module (M)	09 14 002 2647	09 14 005 2647	09 14 002 2602	09 14 003 2602
	Female module (F)	09 14 002 2742	09 14 005 2742	09 14 002 2702	09 14 003 2702
	Cross-section	6 ... 16 mm ²	6 ... 16 mm ²	2.5 ... 8 mm ²	2.5 ... 8 mm ²
	Male module (M)	09 14 002 2646	09 14 005 2646	09 14 002 2601	09 14 003 2601
	Female module (F)	09 14 002 2741	09 14 005 2741	09 14 002 2701	09 14 003 2701
16 A		Han E® Quick Lock module	Han® EE Quick Lock module	Han® ES module	Han E® screw module
	Number of contacts	6	8	5	5
	Electrical data	16 A / 500 V	16 A / 400 V	16 A / 400 V	16 A / 230/400 V
	Termination type	Quick Lock termination	Quick Lock termination	Cage clamp termination	Screw termination
	Cross-section	0.5 ... 2.5 mm ²	0.5 ... 2.5 mm ²	0.14 ... 2.5 mm ²	0.5 ... 2.5 mm ²
	Male module (M)	09 14 006 2633	09 14 008 2633	09 14 005 2616	09 14 005 2601
	Female module (F)	09 14 006 2733	09 14 008 2733	09 14 005 2716	09 14 005 2701
≤ 10 A		Han DD® Quick Lock module	Han DD® Quick Lock module		
	Number of contacts	12, silver plated	12, gold plated		
	Electrical data	10 A / 250 V	10 A / 250 V		
	Termination type	Quick Lock termination	Quick Lock termination		
Axial screw termination	Cross-section	0.25 ... 1.5 mm ²	0.25 ... 1.5 mm ²		
	Male module (M)	09 14 012 2632	09 14 012 2634		
	Female module (F)	09 14 012 2732	09 14 012 2734		
	Hexagonal drivers	with grip	Bit 1/4"	Adapter 3/8"	Hexagonal torque set
	2 mm (40 A)	09 99 000 0313	09 99 000 0369		09 99 000 0834
	2.5 mm (70 A)		09 99 000 0375		09 99 000 0834
	4 mm (100 A)	09 99 000 0363		09 99 000 0370	09 99 000 0833
	5 mm (200 A)	09 99 000 0364		09 99 000 0371	09 99 000 0833

* Double module, requires two places in the frame

Power and Signal Modules – Crimp termination



PE		Han® PE module (Including crimp contact for earthing)				
Number of contacts		1 x PE	1 x PE	1 x PE		
Cross-section		35 mm²	25 mm²	16 mm²		
Termination type		Crimp termination, Han® HC	Crimp termination, Han® HC	Crimp termination, Han® HC		
Male module (M)		09 14 001 3074	09 14 001 3073	09 14 001 3072		
Female module (F)		09 14 001 3174	09 14 001 3173	09 14 001 3172		
70 - 200 A			Han® 200 A Crimp module	Han® 100 A Crimp module	Han® 100 A Single module	Han® 70 A Crimp module
						
	Number of contacts		1*	2*	1	2
	Electrical data		200 A / 1000 V	100 A / 1000 V	100 A / 830 V	70 A / 1000 V
	Cross-section		25 ... 70 mm²	10 ... 35 mm²	10 ... 35 mm²	6 ... 25 mm²
	Termination type		Crimp termination, Han® HC	Crimp termination, Han® HC	Crimp termination, Han® HC	Crimp termination, Han® HC
	Male module (M)		09 14 001 3003	09 14 002 3051	09 14 001 3031	09 14 002 3041
	Female module (F)		09 14 001 3103	09 14 002 3151	09 14 001 3131	09 14 002 3141
40 A			Han® 40 A Crimp module	Han® C module	Han® CC module	Han® CD module
						
	Number of contacts		2	3	4	3 + 4
	Electrical data		40 A / 1000 V	40 A / 690 V	40 A / 830 V	40 A + 10 A / 830 V
	Cross-section		1.5 ... 10 mm²	1.5 ... 6 mm²	1.5 ... 6 mm²	0.14 ... 6 mm²
16 A	Termination type		Crimp termination, Han® C	Crimp termination, Han® C	Crimp termination, Han® C	Crimp, Han® C + Han D®
	Male module (M)		09 14 002 3002	09 14 003 3001	09 14 004 3041	09 14 007 3001
	Female module (F)		09 14 002 3102	09 14 003 3101	09 14 004 3141	09 14 007 3101
≤ 10 A			Han E® module	Han® EE module	Han® EEE module	Han E® Protected module
						
	Number of contacts		6	8	20*	6
	Electrical data		16 A / 500 V	16 A / 400 V	16 A / 500 V	16 A / 830 V
	Cross-section		0.14 ... 4 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²
Signal + Shielded	Termination type		Crimp termination, Han E®	Crimp termination, Han E®	Crimp termination, Han E®	Crimp termination, Han E®
	Male module (M)		09 14 006 3001	09 14 008 3001	09 14 020 3001	09 14 006 3041
	Female module (F)		09 14 006 3101	09 14 008 3101	09 14 020 3101	09 14 006 3141
Signal + Shielded			Han DD® module	Han® DDD module	Han DD® double module	Han DD® Quad module
						
	Number of contacts		12	17	36*	42*
	Electrical data		10 A / 250 V	10 A / 150 V	10 A / 400 V	10 A / 150 V
	Cross-section		0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²
Signal + Shielded	Termination type		Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, Han D®
	Male module (M)		09 14 012 3002	09 14 017 3001	09 14 036 3002	09 14 042 3001
	Female module (F)		09 14 012 3102	09 14 017 3101	09 14 036 3102	09 14 042 3101
Signal + Shielded			Han® High Density module	Han® Full High Density module	Han® Shielded module Basic	Han® Shielded Power module
						
	Number of contacts		25	36	27 + shielding	4 + 2 + shielding
	Electrical data		4 A / 50 V	4 A / 32 V	4 A / 32 V	16 A / 400 V
	Cross-section		0.08 ... 0.52 mm²	0.14 ... 0.5 mm²	0.09 ... 0.5 mm²	0.14 ... 4 mm²
Signal + Shielded	Termination type		Crimp termination, D-Sub	Crimp termination, D-Sub	Crimp termination, D-Sub	Crimp, Han E® + Han D®
	Male module (M)		09 14 025 3001	09 14 036 3001	09 14 027 3022	09 14 006 3021
	Female module (F)		09 14 025 3101	09 14 036 3101	09 14 027 3122	09 14 006 3121

* Double module, requires two places in the frame

Data Transfer Modules



Han® RJ45 module	Han® RJ45 module	for patch cable	for IDC	for patch cable	for IDC and preLink
	- 8 contacts - cat. 6 _A - 10 Gbit/s				
	Part numbers	Male module (M) 09 14 001 4623	Male module (M) 09 14 001 4623	Female module (F) 09 14 001 4721	Female module (F) 09 14 001 4722
		Adapter for patch cable: 09 14 000 9966	RJ Industrial IDC: 09 45 400 1560		RJ45 female IDC: 09 14 545 1561
		Patch cable cat. 6: 09 47 474 71xx			RJ45 female preLink: 09 14 008 4720
Han-Quintax® Modules		Han-Quintax®	Han® High Density Quintax	Han D® Coax	Han E® Coax
	Quintax modul				
	Number of contacts	2 x 4*	2 x 8*	2 x Coax*	2 x Coax*
	Male module (M)	09 14 002 3004	09 14 002 3004	09 14 002 3004	09 14 002 3004
	Female module (F)	09 14 002 3104	09 14 002 3104	09 14 002 3104	09 14 002 3104
	Insert (Cable Ø ≤ 9.5 mm)				
	Data rate	100 Mbit/s (cat. 5e)	100 Mbit/s (cat. 5e)	≤ 500 Mhz / 75 Ω	≤ 500 Mhz / 50 Ω
	Electrical data	10 A / 50 V	5 A / 50 V	10 A / 50 V	16 A / 50 V
	Cross-section	0.14 ... 2.5 mm²	0.09 ... 0.52 mm²	0.14 ... 2.5 mm²	0.14 ... 4 mm²
	Termination type	Crimp termination, Han D®	Crimp termination, D-Sub	Crimp termination, Han D®	Crimp termination, Han E®
Han® GigaBit – Han® MegaBit Modules	Adapter Module				
	Male module (M)	09 14 001 3011	09 14 001 3011	09 14 001 3011	09 14 001 3011
	Female module (F)	09 14 001 3111	09 14 001 3111	09 14 001 3111	09 14 001 3111
	Insert (Cable Ø ≤ 14 mm)				
	Number of contacts	8	2 x 4	8	20
	Data rate	10 Gbit/s (cat. 6 _A)**	2 x 100 Mbit/s (cat. 5e)	1 Gbit/s (cat. 5e)	
	Electrical data	5 A / 50 V	10 A / 50 V	10 A / 50 V	4 A / 32 V
	Cross-section	0.09 ... 0.52 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.09 ... 0.52 mm²
	Termination type	Crimp termination, D-Sub	Crimp termination, Han D®	Crimp termination, Han D®	Crimp termination, D-Sub
	Shielding termination	Crimp flange	2 x crimp flange	Crimp flange	Crimp flange
Serial Bus Modules	Male insert (M)	09 14 008 3011	09 14 008 3016	09 14 008 3021	09 14 020 3013
	Female insert (F)	09 14 008 3111	09 14 008 3116	09 14 008 3121	09 14 020 3113
		with PE shielding termination	with PE shielding termination	with PE shielding termination	
	Male insert (M)	09 14 008 3012	09 14 008 3017	09 14 008 3022	
	Female insert (F)	09 14 008 3112	09 14 008 3117	09 14 008 3122	
Serial Bus Modules		Han D-Sub module	Han® USB module	Han® FireWire module	Han® ID CAN module
	Number of contacts	9 + shielding	8	6	7
	Data rate	12 Mbit/s (Profibus)	5 Gbit/s (USB 3.0)	400 Mbit/s (IEEE 1394a)	1 Mbit/s (CAN bus)
	Electrical data	5 A / 50 V	1 A / 50 V	1 A / 50 V	24 V
Serial Bus Modules	Cross-section	0.09 ... 0.52 mm²			0.13 ... 1.5 mm²
	Termination type	Crimp termination, D-Sub	USB patch cable	FireWire patch cable	Cage clamp termination
	Male module (M)	09 14 009 3001	09 14 001 4601	09 14 001 4611	09 80 015 0100
	Female module (F)	09 14 009 3101	09 14 001 4703	09 14 001 4711	09 80 115 0200

* Double module, requires two places in the frame ** Cat 7_A version also available, see HARTING eCatalogue

Modules for different Media



Coaxial Modules		Han® Multi Module (for D-Sub coaxial contacts)		Han® Multi Module (for DIN 41626 coaxial contacts)	
	Number of contacts	4	4	12*	12*
	Male module (M)	09 14 004 4501	09 14 004 4501	09 14 012 4501	09 14 012 4501
	Female module (F)	09 14 004 4513	09 14 004 4513	09 14 012 4512	09 14 012 4512
	Coaxial contacts (≤ 2 GHz)				
	Impedance	75 Ω	50 Ω	75 Ω	50 Ω
	Coaxial cable	RG179, RG187	RG174, RG188, RG316	RG179, RG187	RG174, RG188, RG316
	Termination type	Crimp /crimp termination	Crimp /crimp termination	Solder /crimp termination	Solder /crimp termination
Optical Modules		Han® LC module	Han® SC module	Han® Multi module	Han® Multi module
	Number of contacts	6	4	4	12*
	Male module (M)	09 14 006 4701	09 14 004 4701	09 14 004 4501	09 14 012 4501
	Female module (F)	09 14 006 4711	09 14 004 4711	09 14 004 4512	09 14 012 4512
	Contacts				
	1 mm POF		20 10 001 5211	Male: 20 10 001 4211 Female: 20 10 001 4221	Male: 20 10 001 4211 Female: 20 10 001 4221
	1 mm POF Fast assembly termination		20 10 001 5217		
	SI-Fibre 200 / 230 µm Multi-Mode		20 10 230 5211	Male: 20 10 230 4211 Female: 20 10 230 4221	Male: 20 10 230 4211 Female: 20 10 230 4221
Pneumatic Modules		Pneumatic contacts (max. 10 bar)			Pneumatic module
	For tube outer diameter				Number of contacts: 3 (order separately)
	Tube-Ø	6 mm OD	4 mm OD	3 mm OD	
	Male contact	09 14 000 6356	09 14 000 6354	09 14 000 6353	
	Female without shut-off	09 14 000 6456	09 14 000 6454	09 14 000 6453	
	Female with shut-off	09 14 000 6466	09 14 000 6464	09 14 000 6463	
	For tube inner diameter				
	Tube-Ø	6 mm ID	4 mm ID	3 mm ID	
	Male contact	09 14 000 6306	09 14 000 6304	09 14 000 6303	male module (M) 09 14 003 3501
Further Modules		Han® HV module 40A	Han® HV Single module	Han-Eco® PE module	Han® Dummy module
					to fill-up empty module places
	Number of contacts	2*	2	1 x PE	
	Electrical data	40 A / 2900 / 5000 V	16 A / 2500 V	for Han-Eco® hoods/housings only	
	Cross-section	1.5 ... 10 mm²	0.14 ... 4 mm²	1.5 ... 16 mm²	
	Termination type	Crimp termination, Han C®	Crimp termination, Han E®	Screw termination	
	Male module (M)	09 14 002 3023	09 14 002 3025	19 41 001 2600	09 14 000 9950
	Female module (F)	09 14 002 3123	09 14 002 3125	19 41 001 2700	

* Double module, requires two places in the frame



Pushing Performance

HARTING.com –
the gateway to your
country website.

HARTING Technology Group

info@HARTING.com

www.HARTING.com